


30575 PRESSURE RELIEF VALVE 7,500 PSI

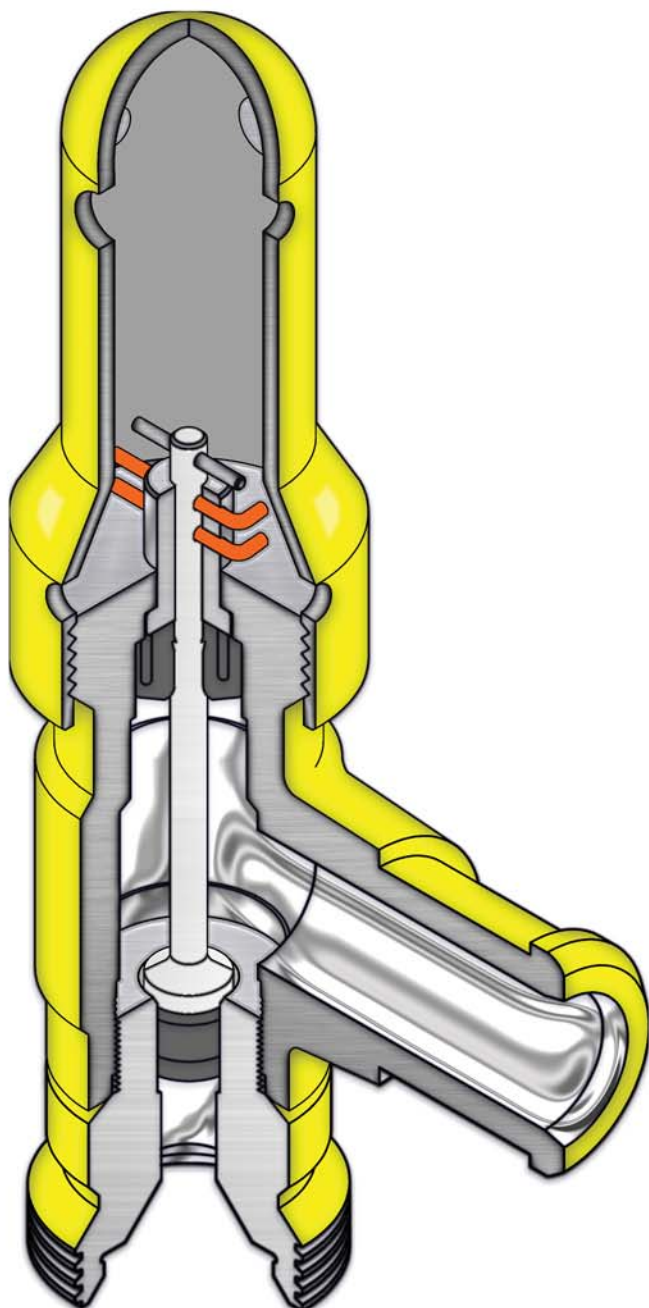

- Relief at working pressures of 1,500 to 7,500 PSI.
- Overpressures are relieved by the shearing of custom ground Oteco Shear Pins.
- All components manufactured in our Houston, Texas, USA facility ensuring quality parts for operation and repair.
- Hardened stainless steel stems and liner subs offer improved corrosion and erosion resistance for longer product life.
- Modified thread safety cover that removes easily for setting and resetting the valve.
- Forged bodies provide greater strength over competitors castings.
- Easy operation and low cost repair.

| | | | | | | | |
|--|--------|------------------------------|--------|-----------------------|-------|-------|-------|
| OTECO | | PRESSURE RELIEF VALVE | | PART NO. 30575 | | | |
| SERIAL NO. | | | | | | | |
| 7500 PSI MAX. WORKING PRESSURE 250 DEG F MAX. TEMPERATURE | | | | | | | |
| WARNING: INSTALLATION, OPERATION, AND MAINTENANCE OF THIS VALVE MUST BE IN ACCORDANCE WITH OTECO ENGINEERING BULLETINS EB-001, EB-002, & EB-003. COPIES OF THESE BULLETINS MAY BE OBTAINED BY CALLING COLLECT 713-695-3693. | | | | | | | |
| SHEAR PIN NO. | 60 | 50 | 45 | 40 | 30 | 20 | 16 |
| SHEAR PIN COLOR | ORANGE | BLACK | SILVER | GREEN | GREY | RED | BLUE |
| NOMINAL RELIEF PRESSURE, PSI (1 PIN) | 3,750 | 3,375 | 3,000 | 2,625 | 2,250 | 1,875 | 1,500 |
| PSI (2 PINS) | 7,500 | 6,750 | 6,000 | 5,250 | 4,500 | 3,750 | 3,000 |
| OTECO, INC. - 2828 TROUT ST. - HOUSTON, TEXAS USA 77093 | | | | | | | |

| Size | Pressure Range PSI | (Bar) | OTECO Part # | Description | Weight Lbs. | (kg) |
|------|-----------------------|-----------|-----------------|--|----------------|--------|
| 3" | 1,500-7,500 | (103-517) | 133075 | 30575,3" Fig.1502 Female Inlet X Male Outlet | 122.0 | (55.3) |